




4TH FLOOR DESIGN LOADS:		DECK DESIGN LOADS:		ROOF DESIGN LOADS:		WIND LOADS:		SEISMIC:	
40	LIVE LOAD	100	LIVE LOAD	30	SNOW (+DRIFTING)	90 MPH	3-SECOND GUST	SITE CLASS	D
20	2" CONCRETE SLAB ON CONFORM	20	2" CONCRETE SLAB ON CONFORM	10	ROOFING	75 MPH	SUSTAINED	DESIGN CATEGORY	B
4	JOISTS AND BRIDGING	4	JOISTS AND BRIDGING	3	DECK AND INSULATION	12.8 PSF	(END ZONE)		
2	GIRDERS AND COLUMNS	3	CEILING	3	JOIST AND BRIDGING	8.5 PSF	(INTERIOR ZONE)		
3	CEILING			3	CEILING				
4	MECHANICAL, FLOOR FINISHES, MISC.			4	MECHANICAL, MISC.				
75 PSF TOTAL		127 PSF TOTAL		53 PSF TOTAL					
UNLESS NOTED, ELEVATION		UNLESS NOTED, ELEVATION		UNLESS NOTED, ELEVATION					
T/ DECK	+37'-8"	T/ DECK	+37'-4"	T/ DECK	+48'-10"				
T/JOISTS (& BEAMS W/*)	+37'-4 1/2"	T/JOISTS (& BEAMS W/*)	+37'-0 1/2"	T/JOISTS (& BEAMS W/*)	+48'-8 1/2"				
T/ JOIST BEARING	+37'-2"	T/ JOIST BEARING	+36'-10"	T/ JOIST BEARING	+48'-6"				

NOTE:
 REFER TO INTEL SCHEDULE ON SHEET S.2

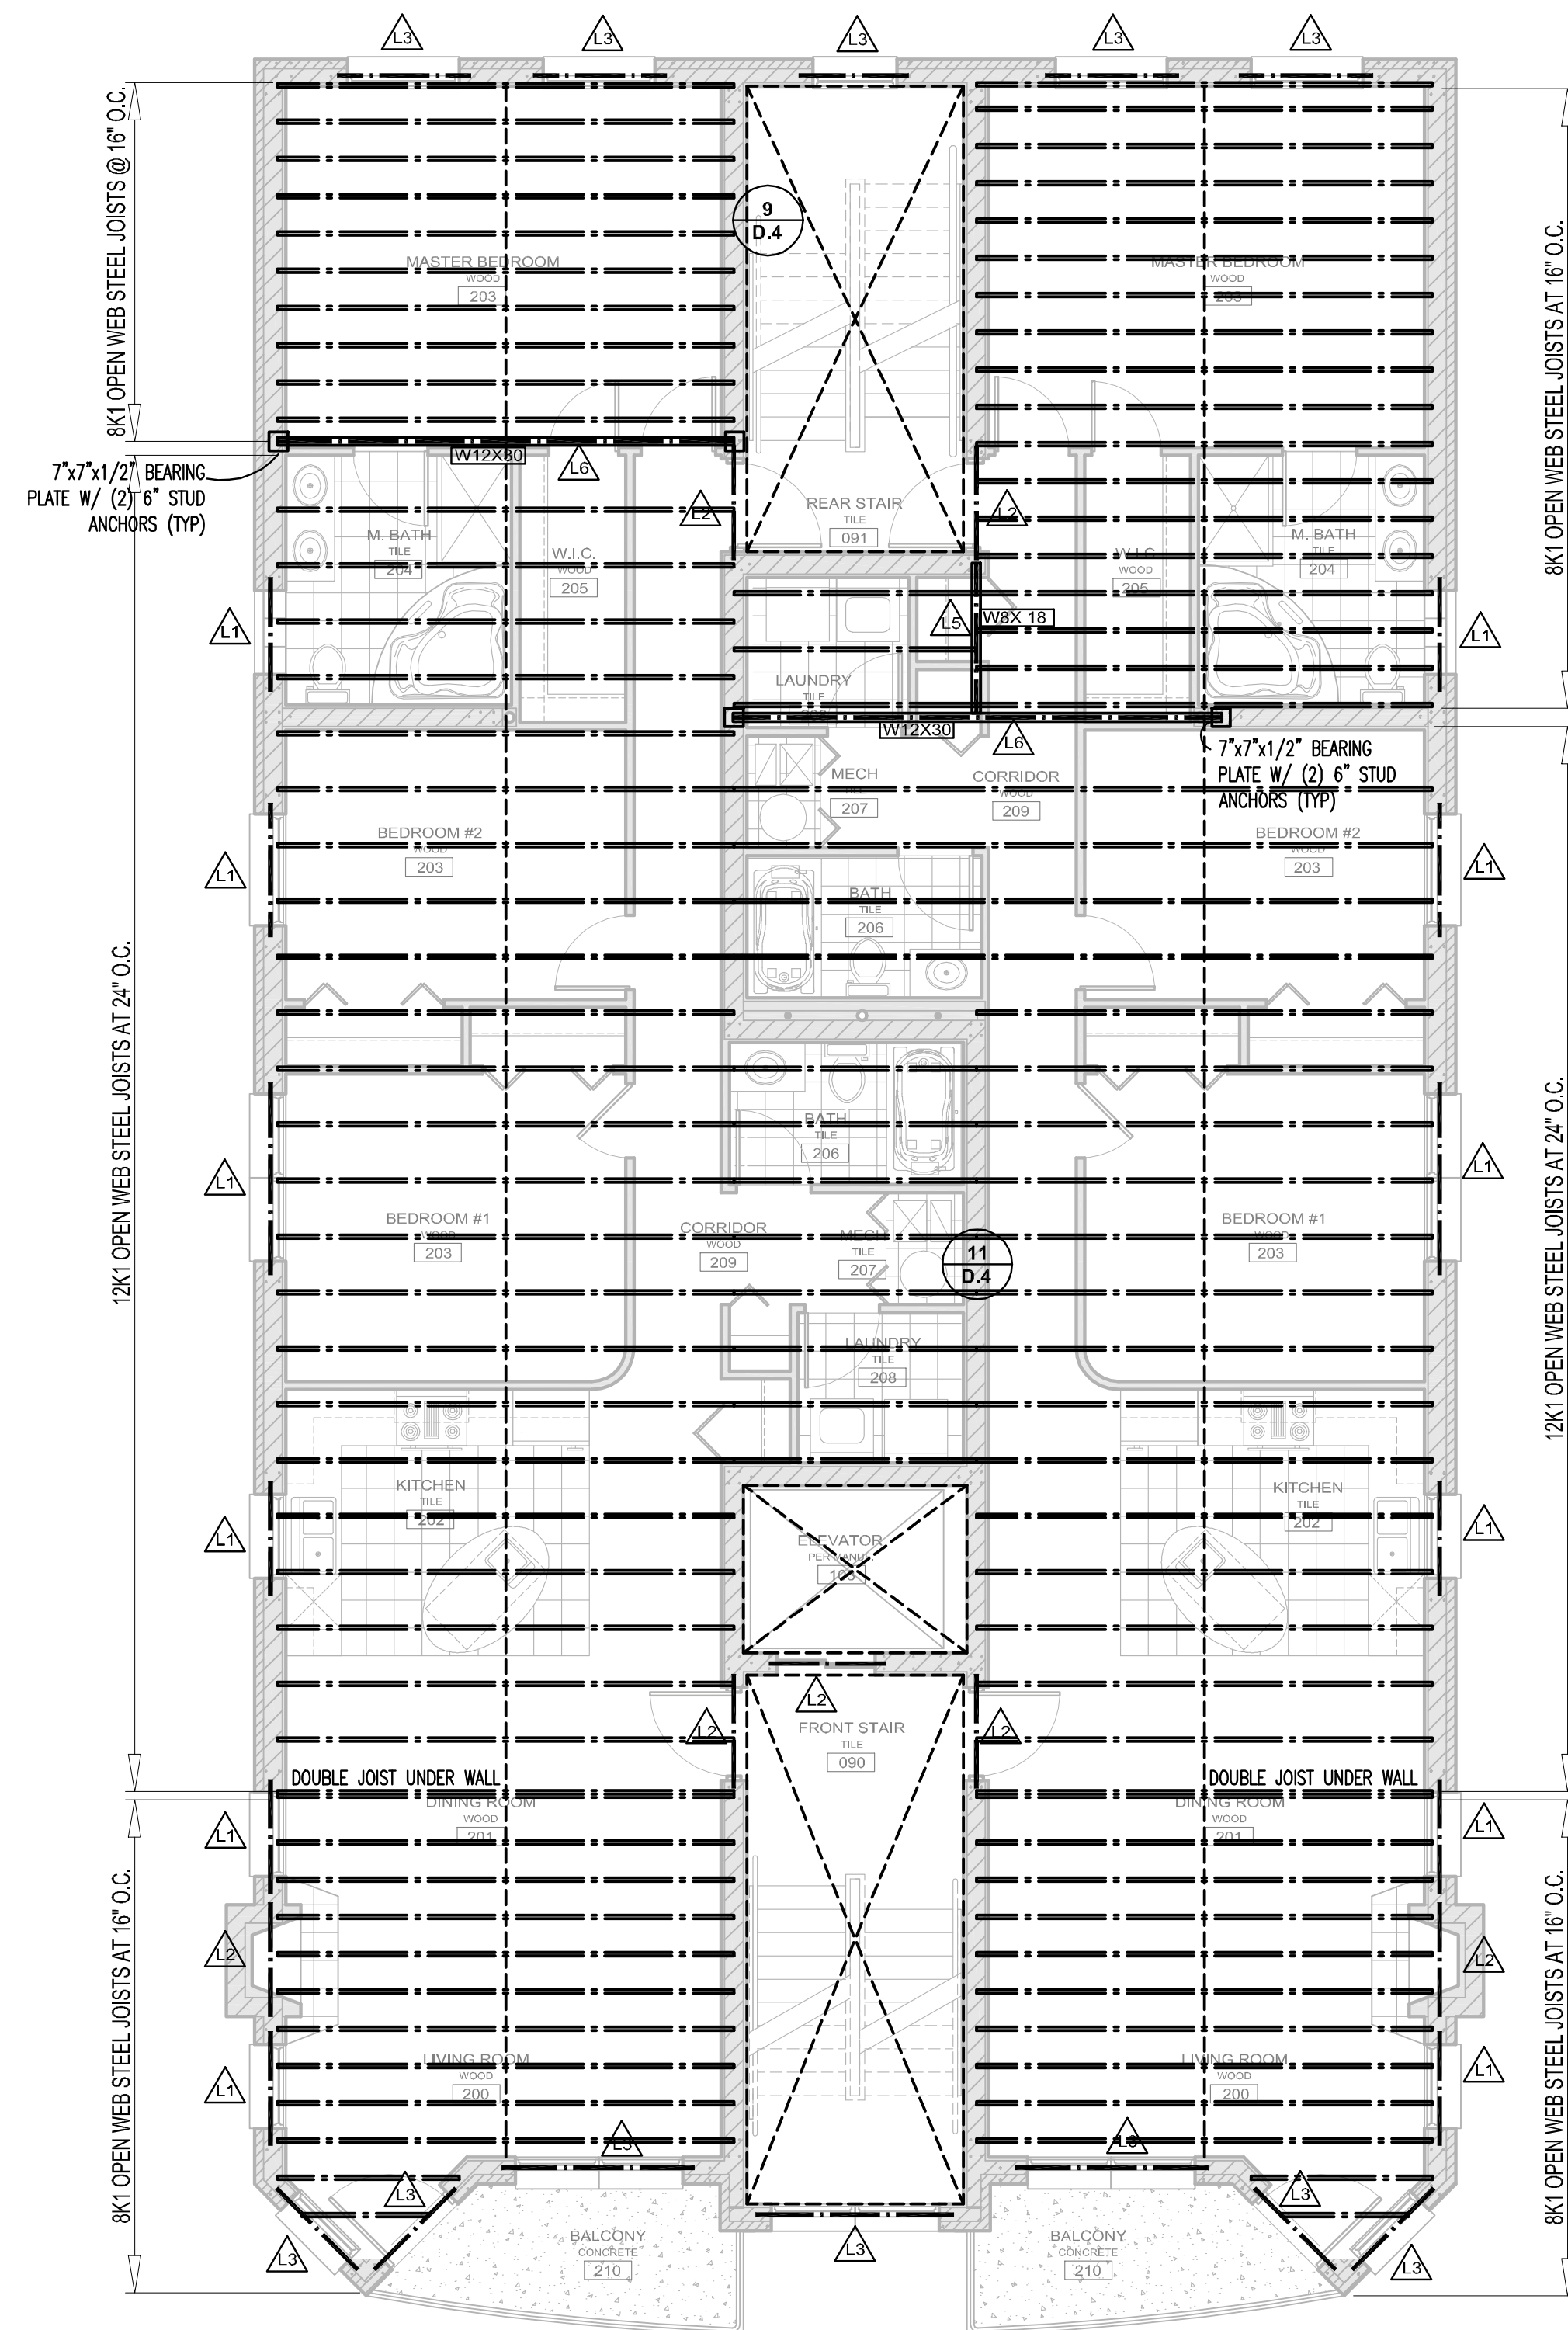

4TH FLOOR FRAMING PLAN

SCALE: 3/16" = 1'-0"

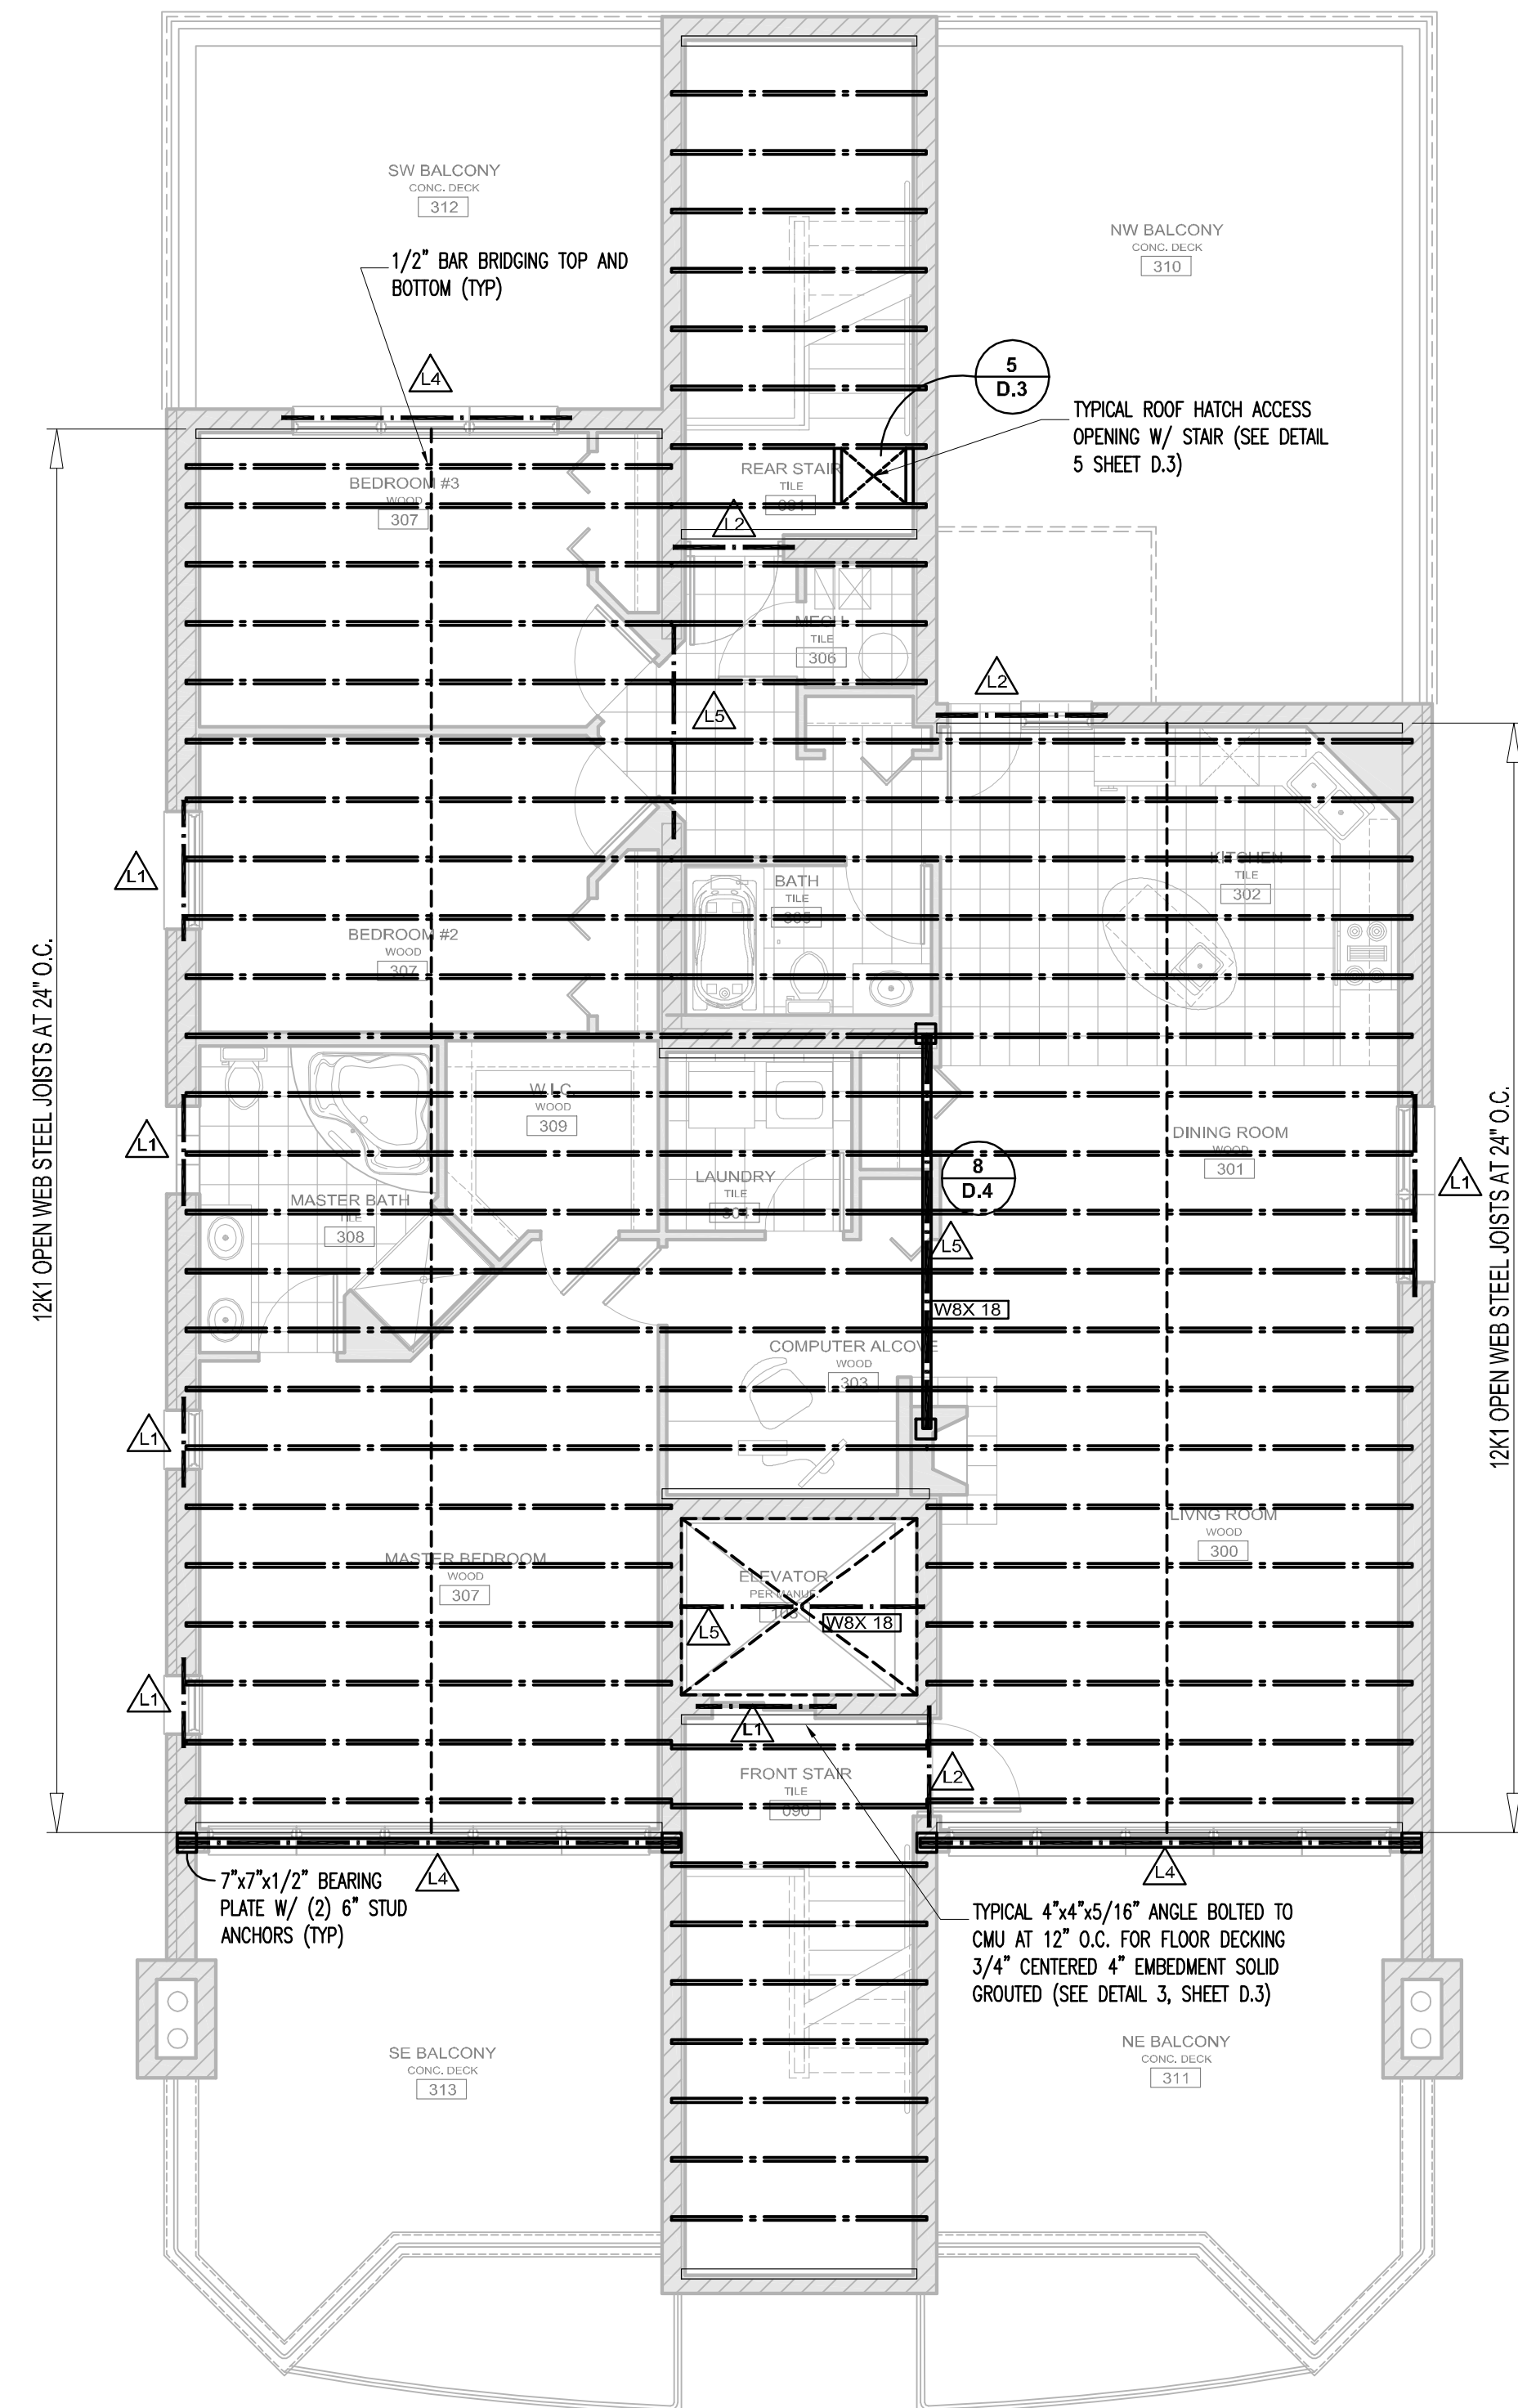

ROOF FRAMING PLAN

SCALE: 3/16" = 1'-0"

