
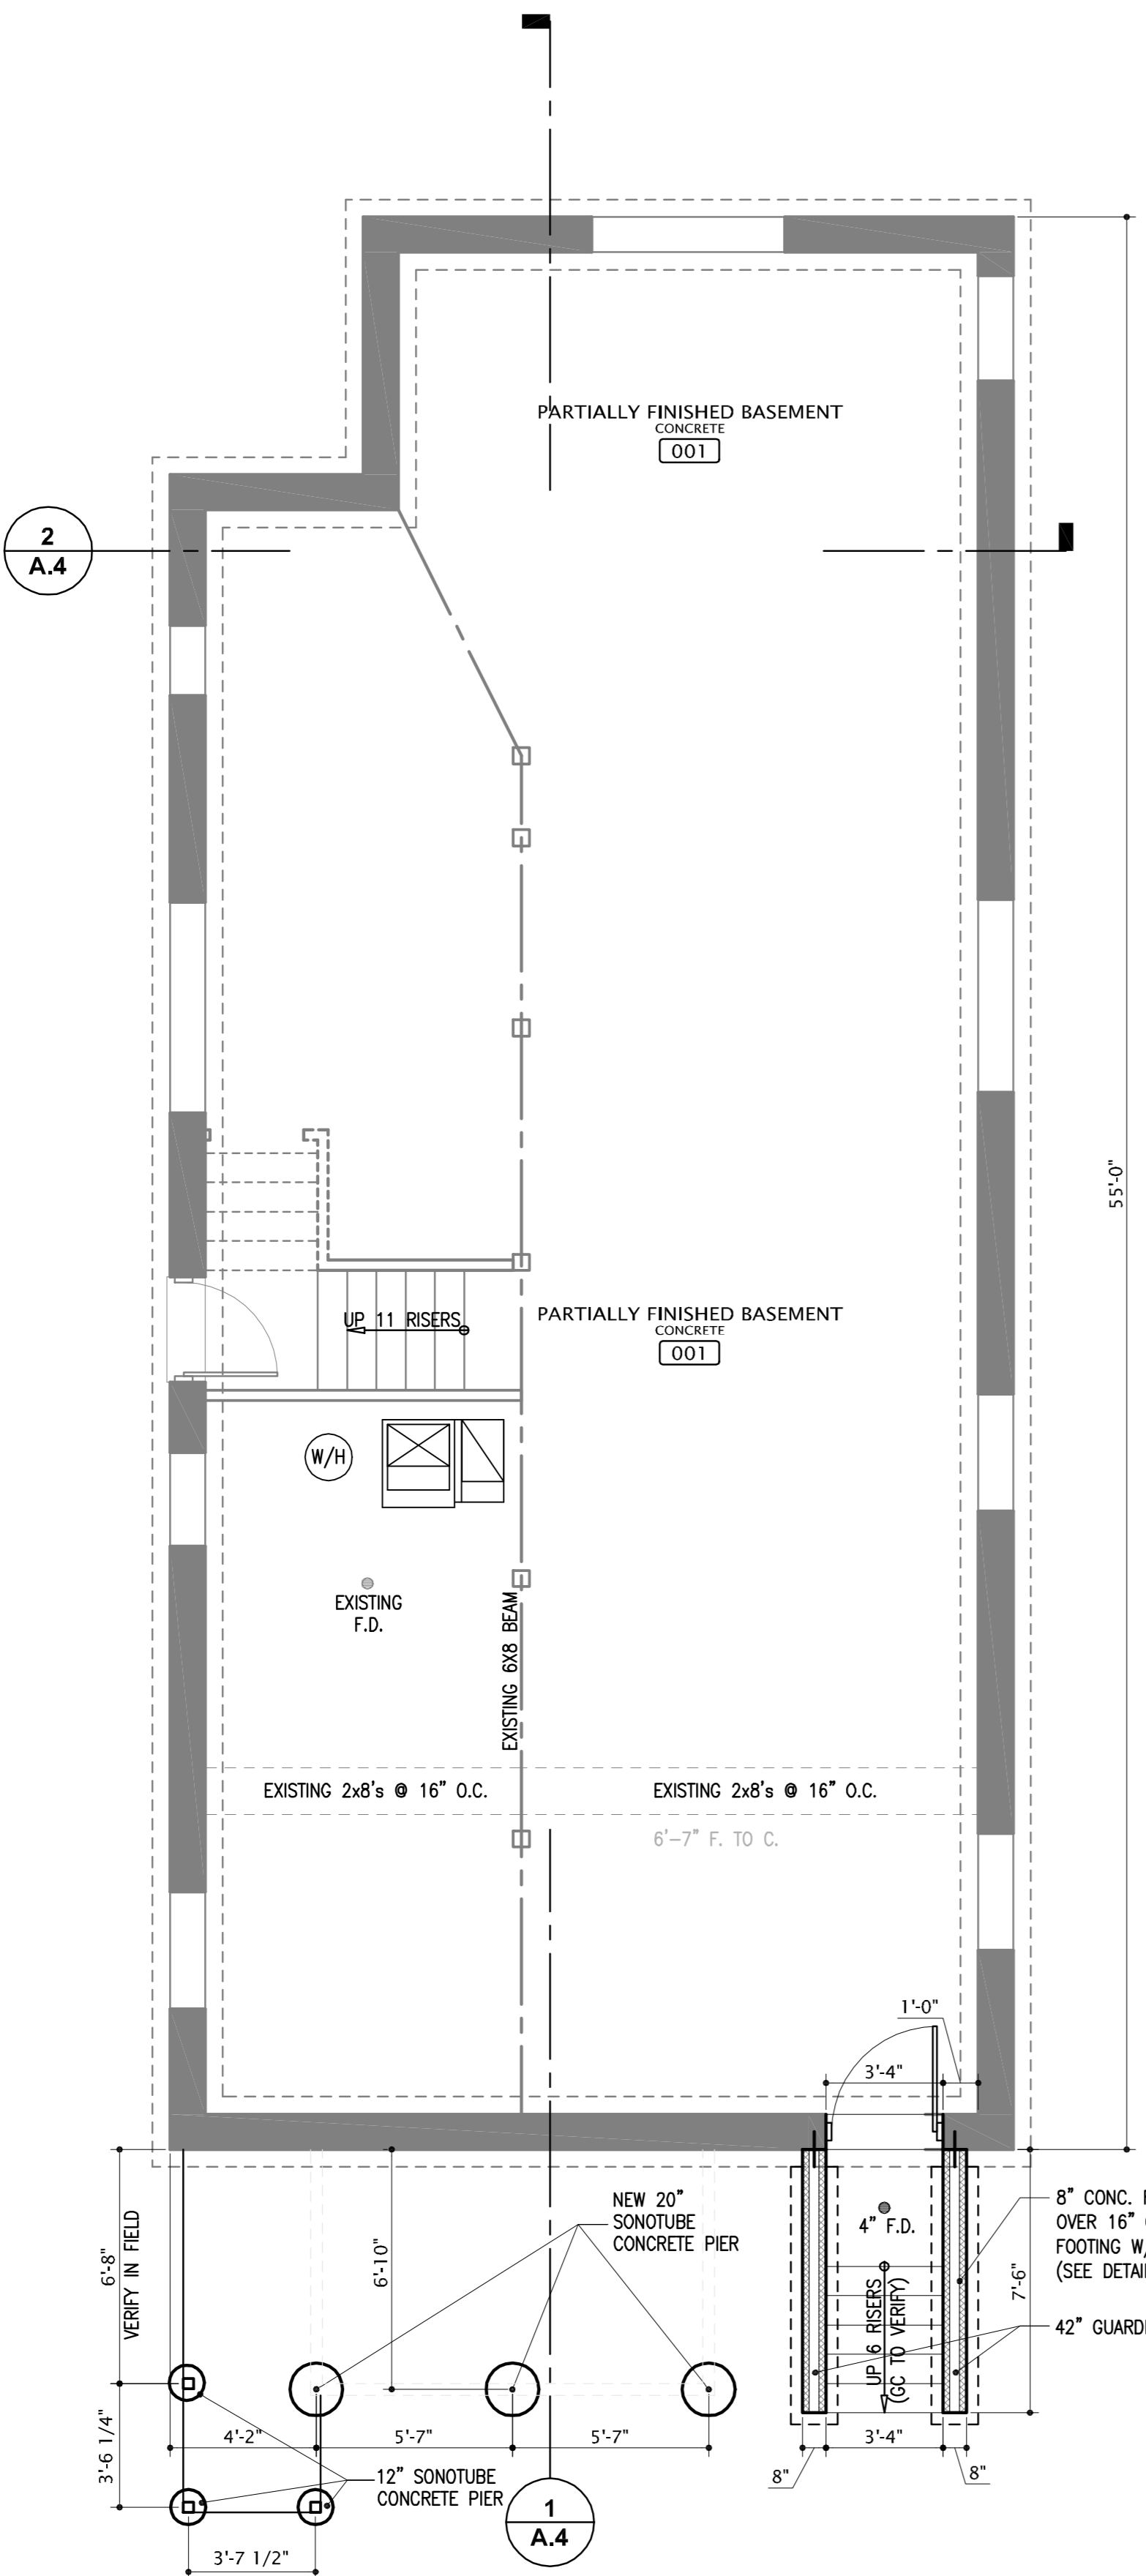



Door Notes

1. VERIFY ALL DOOR OPENINGS PRIOR TO ORDERING ANY DOORS.
2. ALL DOORS TO CONFORM TO CHICAGO BUILDING CODE.
3. ALL INTERIOR DOORS TO BE 6 PANEL, HOLLOW CORE DOORS, PAINTED.
4. ALL EXTERIOR DOORS TO BE EXTERIOR GRADE, LOCKABLE TYPE WITH LEVER TYPE HARDWARE, TO BE APPROVED BY OWNER.
5. ALL DOOR SELECTIONS SHALL BE APPROVED BY OWNER.


- GENERAL NOTES:**
1. CONTRACTOR TO VERIFY EXISTING DIMENSIONS W/ THOSE SHOWN ON PLANS AND REPORT TO ARCHITECT OF ANY DISCREPANCIES PRIOR TO WORK COMMENCEMENT.
 2. CONCRETE CONTRACTOR TO VERIFY CONDITIONS OF EXISTING FOUNDATIONS AND REPORT TO ARCHITECT AND GENERAL CONTRACTOR PRIOR TO COMMENCING WORK. HE SHALL ASSUME FULL RESPONSIBILITY FOR EXCAVATION, FOUNDATION, AND ALL RELATED ITEMS.
 3. ARCHITECT SHALL NOT BE RESPONSIBLE FOR DAMAGE TO, OR CONDITIONS OF EXISTING BUILDING AND SITE FEATURES ONCE CONSTRUCTION BEGINS.
 4. REMOVE WALLS AS INDICATED. VERIFY LOCATION OF ANY BEARING WALL PRIOR TO REMOVAL ADVISE ARCHITECT.
 5. CARPENTRY CONTRACTOR TO DETERMINE WORTHINESS OF STRUCTURE AFTER ITS COMPLETE EXPOSURE.
 6. ALL EXTERIOR DOORS TO BE KEYLESS IN THE DIRECTION OF EGRESS.
 7. PROVIDE SAFETY GLAZING AT DOORS, SKYLIGHTS, SHOWER/TUB ENCLOSURE.
 8. PROVIDE DOUBLE JOISTS UNDER PARALLEL WALLS AND TUBS, AS WELL AS, WHERE OTHER INCREASED LOADING CONDITIONS MIGHT BE ANTICIPATED.
 9. TYPICAL HEADER IS (2) 2X12s UNLESS OTHERWISE NOTED.
 10. DOUBLE JOISTS BELOW PARALLEL WALLS, CHIMNEY, BATH TUB, SKY LIGHTS AND STAIR OPENINGS
 11. FIRESTOP MECHANICAL PENETRATIONS, STUD, JOIST, AND RAFTER SPACES TO MEET CODE REQUIREMENTS
- SHORING NOTE:**
1. GENERAL CONTRACTOR TO PROVIDE ADEQUATE SHORING AS NEEDED TO PREVENT MOVEMENT OF EXISTING STRUCTURE AT ANY TIME DURING CONSTRUCTION PROJECT.
 2. THESE DRAWINGS DO NOT CONTEMPLATE THE HANDLING OF OR DESIGN CONSIDERATION OF OR INCLUDING THE EXISTENCE OF ANY HAZARDOUS MATERIALS OR WASTE OF ANY MANNER ON SITE. THE OWNER BY INCORPORATION OF THESE DRAWINGS AGREES TO HOLD HARMLESS, DEFEND, OR INDEMNIFY THE ARCHITECT, HIS CONSULTING ENGINEERS, PLANNERS AND CONTRACTORS OF ALL CLAIMS, LAWSUITS, EXPENSES, AND DAMAGES ARISING FROM OR RELATED TO ANY MATERIALS ON THE SITE.
 3. MIN LVL BEAM SUPPORT TO BE (2) TRIMMERS 3" MIN AT EACH END (FOR MAX 3 1/2' X 14" LVL) OR AS OTHERWISE SHOWN

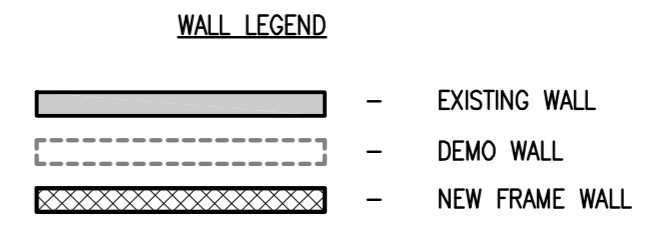

PROPOSED BASEMENT PLAN
SCALE: 1/4" = 1'-0"

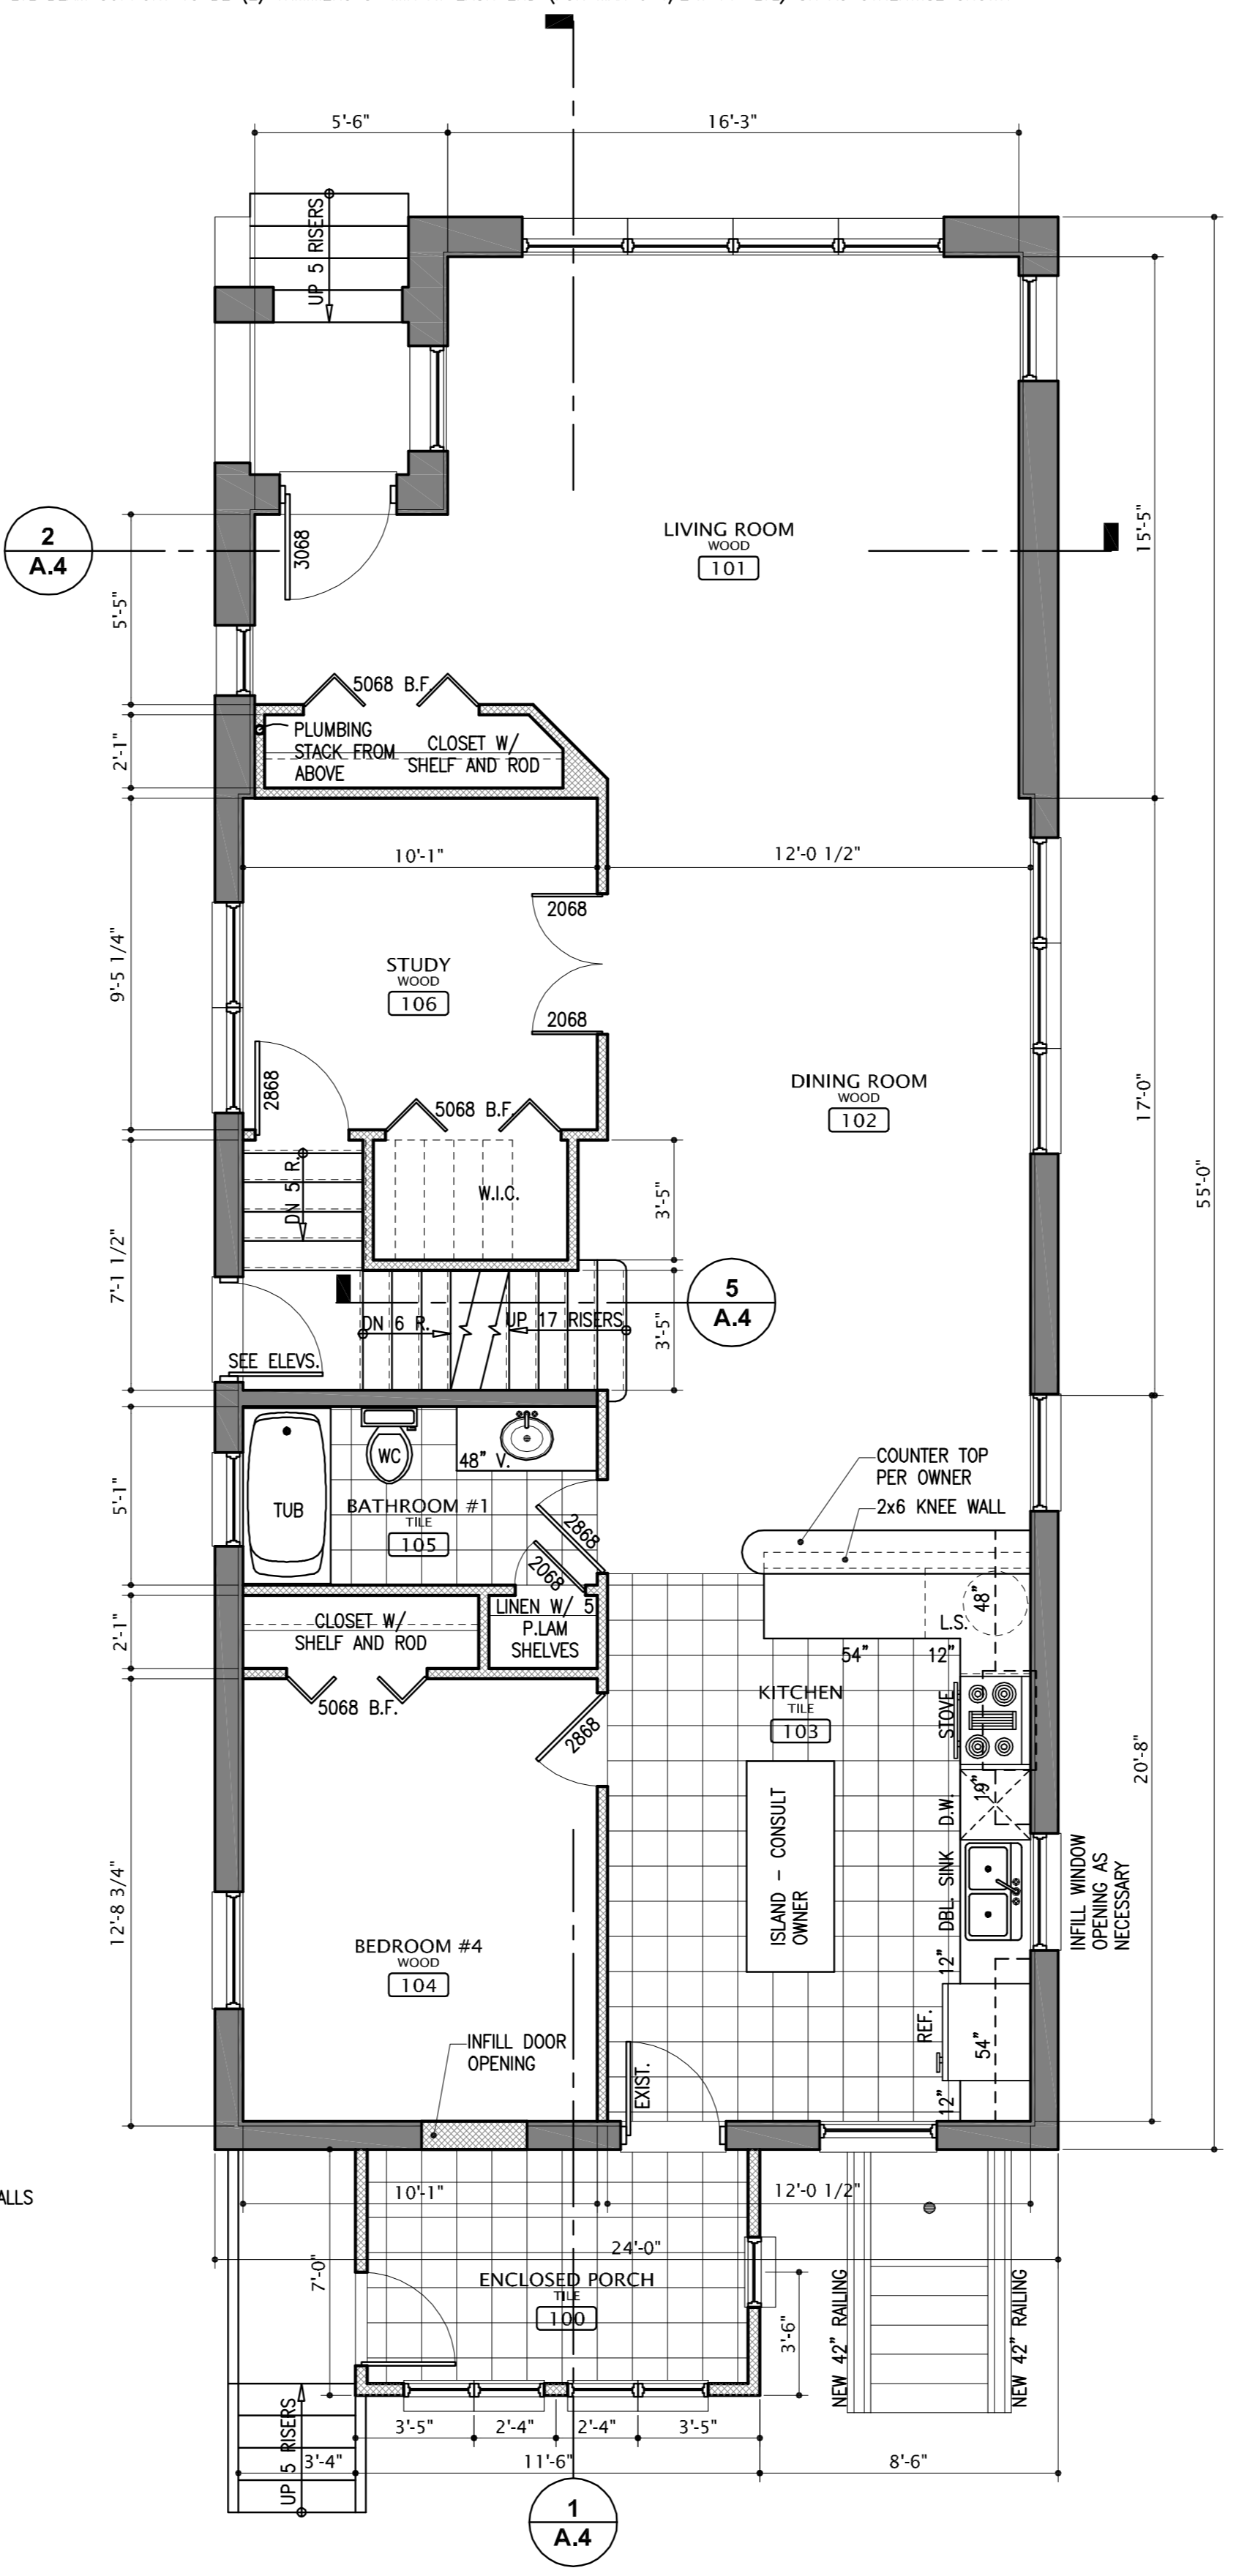

PROPOSED 1st FLOOR PLAN
SCALE: 1/4" = 1'-0"

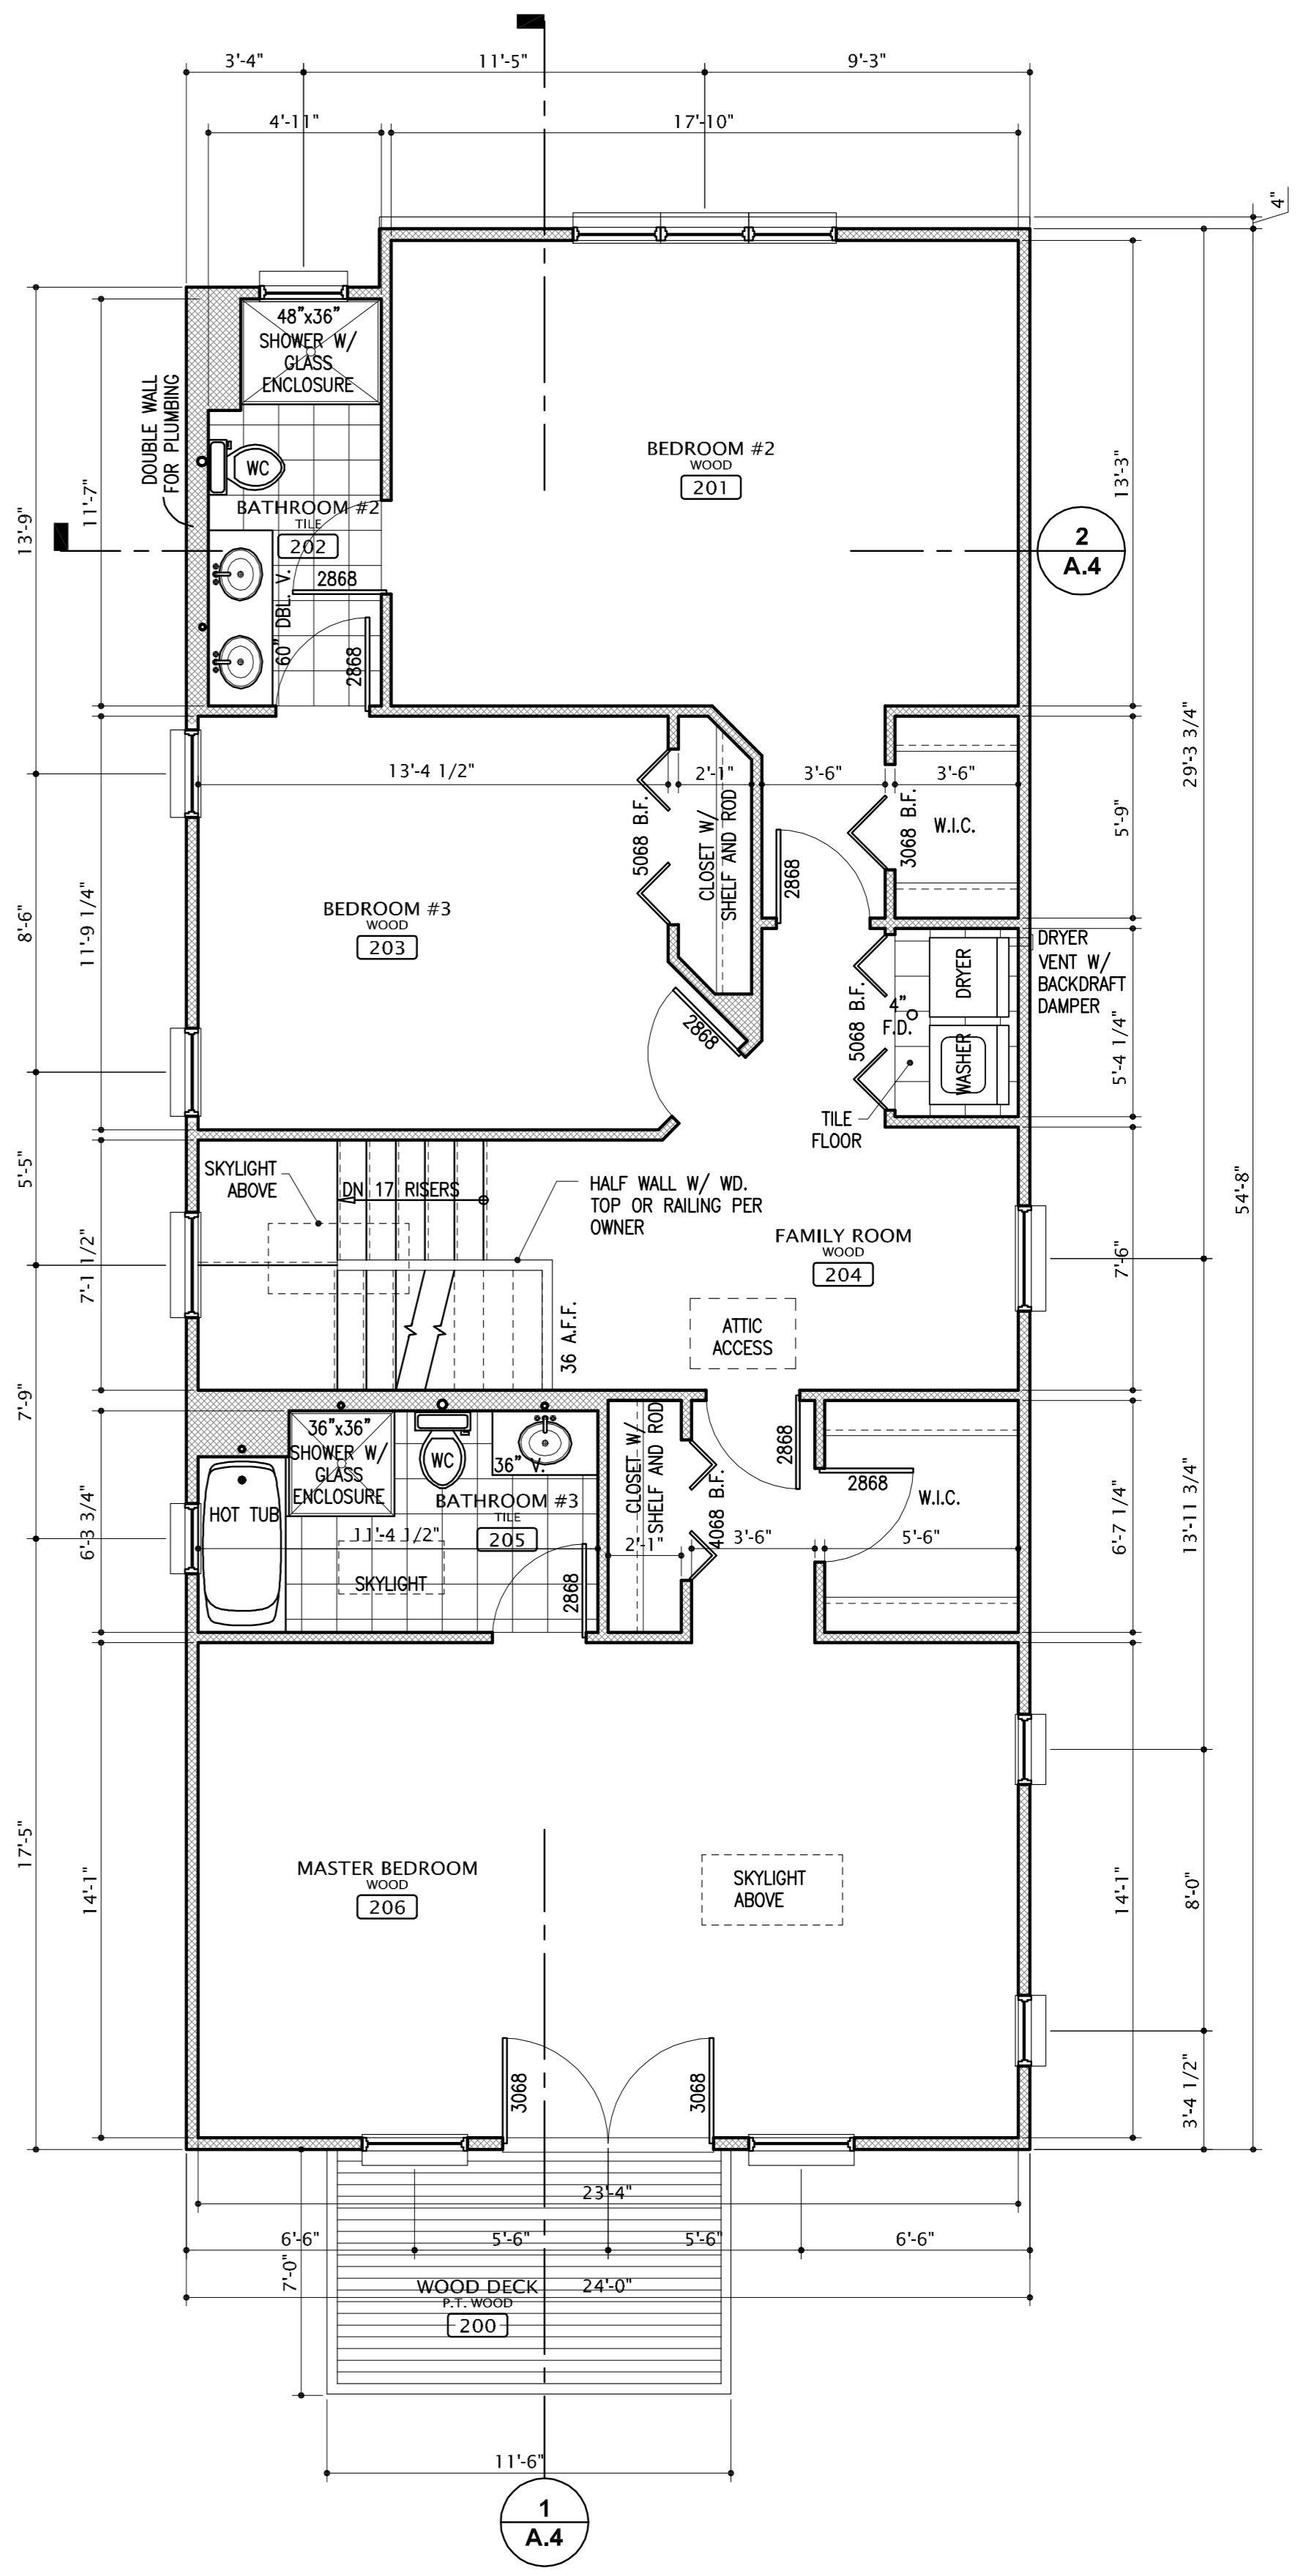

PROPOSED 2nd FLOOR PLAN
SCALE: 1/4" = 1'-0"